



# 00600A1A2N301G

## Adapter

### 6GHz 50Ω SMA(M)/Stainless-SMA(F)/Nickel 2Hole Spring Adapter

#### Features

- ✓ High Repeatability
- ✓ Low VSWR



#### Electrical Specifications

Frequency	DC-6GHz
VSWR	1.15:1(Max.)
Insertion Loss	0.3dB(Max.)
Impedance	50Ohm
Connection 1	SMA Male
Connection 2	SMA Female

#### Mechanical

Durability	500 Cycles
Spring Force	400gf±30gf~590gf±30gf@0~1.7mm


#### Environmental

Operating Temperature	-40°C~85°C
-----------------------	------------


#### Material

Part	Material	Plated
Body	Brass	Nickel
Center Pin	Brass	Gold
Insulator	Teflon	
Spring	SWP	Nickel
Inner Retaining Ring	Brass	
Oring	Silicone	
Nut	Stainless Steel	

#### Outling Drawing (Unit:mm)

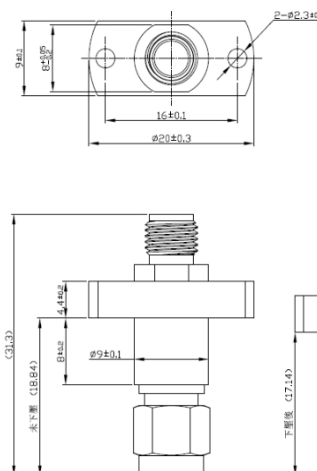

#### Test Report

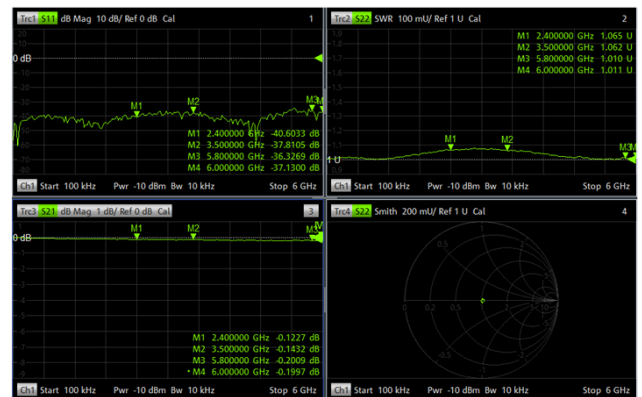

All Specification Changed Without Notification.